



LES DALLES TACTILES

TOUCH SCREEN KEETOUGH 19" KP-190-SWOSOU2

Single-TOUCH

Surface Acoustic Wave single-touch screens with protective frame are perfect for step-by-step use. Convenient single-touch technology prevents accidental touches:

While running production lines

While interacting with the Human Machine Interface (HMI)

While entering a password at security checkpoints

While entering data through payment terminals and ATMs

Single-touch support allows working with non-adapted

Windows software: no reinstallation of the software is needed for touchscreen equipment.

Optional double-touch makes gesture control possible: scroll, swipe, zoom and scale. Learn more on installing the touch technology software drivers for SAW devices.

ANTIVANDAL TECHNOLOGIES

Shock-resistant tempered glass with a 4-6 mm thickness and a 7H hardness is almost impossible to break accidentally.

APPLICATION

GAMING / CASINO SYSTEMS

OUTDOOR AND INDOOR KIOSKS


ENTERTAINMENT

TRANSPORT AND TICKETING

HOSPITALITY

BANKING

CUSTOMIZED SOLUTIONS

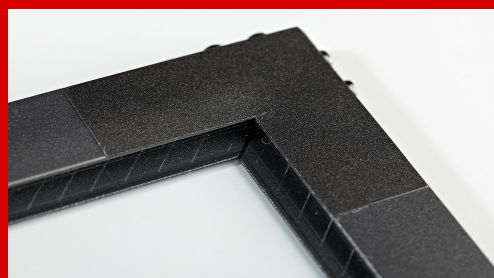

SPLIETERSTRASSE 61, WARENDORF

DEUTSCHLAND, 48231

+49 (0) 25 8161 04089

ENQUIRIES@KEETOUGH.EU



[LINKEDIN.COM/COMPANY/KEETOUGH-EU](https://www.linkedin.com/company/keetouch-eu)



[FACEBOOK.COM/KEETOUGH](https://www.facebook.com/keetouch)



SPECIFICATION *

Model	
Modèle	KP-190-SW0S0U2
Touch screen Type	Touch screen with frame
Screen Features	
Type de l'écran tactile	SAW (Surface Acoustic Wave)
Diagonale	19"
Rapport des côtés	16:10
Zone active (LargeurxHauteur)	412 × 260 mm
Largeur de l'écran	440 mm
Hauteur de l'écran	290 mm
Epaisseur de l'écran	4 – 6 mm (optional)
Matière de l'écran	Glass
Surface hardness	7H
Transparence	90%
Quantité des touches supportées	1
Objet d'une réponse	Finger
Heure d'une réponse	10 ms
Interfaces	
Interface tactile	USB
Environment	
Température de fonctionnement	-20...+60 °C
Température lors de la conservation	-40...+70 °C
Humidité de fonctionnement	20% – 90%
Humidité lors de la conservation	20% – 90%
Power management	
Source d'alimentation	USB
Puissance consommée	Max 0,6 W
Additional Features	
Système opérationnel	Windows XP, Windows 7 and higher, Linux (core 3.0 and higher)

* some factory modifications can be made

Drawing is missing



it will be ready soon